


# VarioCAM<sup>®</sup> hr head


Thermographic Solution for Use in Industry and Research

**< 0.03 K** Thermal Resolution


PCB, close-up image

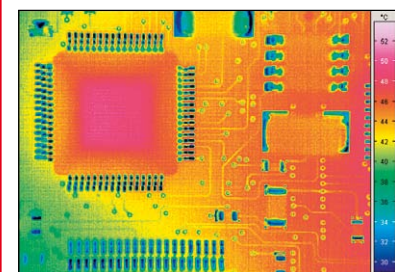


Fault in heating of rear window

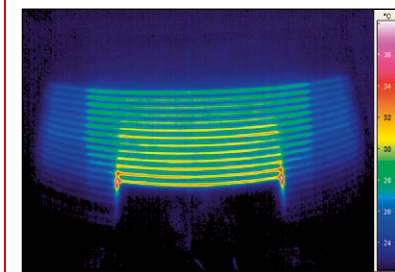


Compressor

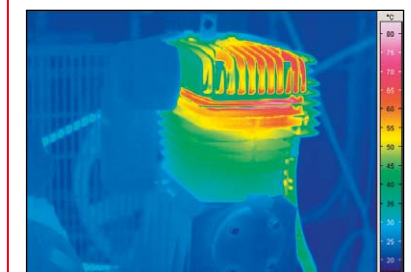

Refrigerator

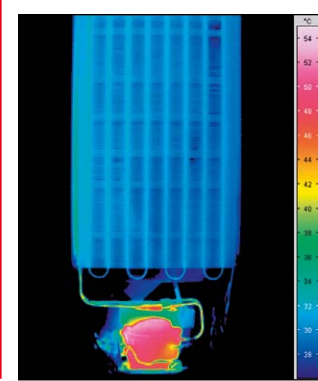

Die casting component

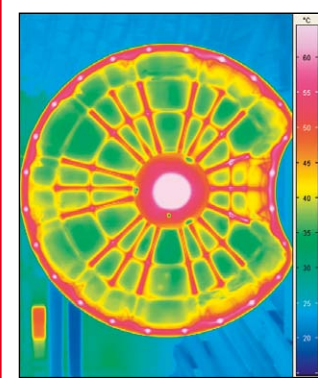

**up to  
1,280 x 960  
infrared pixels**

## Features

- Uncooled FPA Detector with (384 x 288) or (640 x 480) IR pixels
- Optomechanic microscan function provides up to (1,280 x 960) IR pixels\*
- Spectral range (7.5 ... 14)  $\mu$ m
- Real-time thermography with up to 50/60 Hz
- Optional real-time digital interface via FireWire (IEEE 1394)\* or Gigabit Ethernet\*
- External triggering, temperature trigger\*
- Wide standard temperature measuring range
- Compact design, low weight
- Rugged lightweight metal housing (IP65) for use in tough industrial environment
- Available in different versions, wide range of accessories

\* Depending on the particular camera configuration.

# VarioCAM<sup>®</sup> hr head

Thermographic Solution for Use in Industry and Research

## Technical specifications

Spectral range	(7.5 ... 14) $\mu\text{m}$
Detector, Detector format (pixel)	Microbolometer Focal Plane Array, uncooled (384 x 288), "Resolution Enhancement" to (768 x 576)* (640 x 480), "Resolution Enhancement" to (1,280 x 960)*
Temperature measurement range*	(-40 ... 1,200) °C, optional > 2,000 °C
Measurement accuracy	$\pm 1$ °C or $\pm 1$ % (for selected models and areas), otherwise $\pm 2$ °C or $\pm 2$ %
Temperature resolution @ 30 °C	Better than 0.03 K (depending on the model); otherwise better than 0.04 K
IR-frame rate	50/60 Hz
Standard lens (object field)	1.0/25 mm (30 x 23)° with a detector of (384 x 288) pixels 1.0/30 mm (30 x 23)° with a detector of (640 x 480) pixels
Image storage	SD card, optional FireWire (IEEE 1394)*, Gigabit Ethernet*
Dynamic range	16 Bit
Interfaces*	PAL/NTSC-FBAS, S-Video, RS232, FireWire (IEEE 1394)*, Gigabit Ethernet*
Power supply	Power adapter, FireWire (IEEE 1394)*
Operation temperature, encapsulation	(-15 ... 50) °C, IP65
Dimensions	(133 x 91 x 110) mm
Weight	1.3 kg with standard lens

The radiometric thermographic system VarioCAM<sup>®</sup> hr head is based on an uncooled Microbolometer FPA detector with (384 x 288) or (640 x 480) IR pixels and has been designed for universal use. Due to the rugged metal housing (IP65) VarioCAM<sup>®</sup> hr head installations can be realised easily and inexpensively in manufacturing processes. The various versions allow for an optimal adjustment of VarioCAM<sup>®</sup> hr head to different measurement tasks. The scope of performance reaches from automatic recognition and indication of threshold values via RS232 up to digital 60 Hz real-time IR data acquisition via IEEE 1394 or Gigabit Ethernet and online-processing at the PC.

VarioCAM<sup>®</sup> hr head is recommended for various applications in research and development environments based on its wide standard temperature measurement range, a multitude of available lenses as well as a wide range of accessories and a high-speed digital IR data acquisition and analysis software. Specifically customised this easy to handle thermographic system can also be used for monitoring tasks that require continuous and automatic operation.

## Lenses and close-up-lenses

Detector type (pixel)	(384 x 288) (640 x 480)		
	Focal distance	FOV (°)	FOV (°)
Super wide-angle lens	8 mm	(80 x 64)	(90 x 74)
Wide-angle lens	12.5 mm	(57 x 44)	(65 x 51)
Standard lens	25 mm	(30 x 23)	-
Standard lens	30 mm	(25 x 19)	(30 x 23)
Telephoto lens	50 mm	(15 x 12)	(18 x 14)
Telephoto lens	75 mm	(10 x 7.5)	(12 x 9)
Telephoto lens	130 mm	(6 x 4.5)	(7 x 5.5)

Close-up lenses	Pixel size**	FOV (mm <sup>2</sup> )	FOV (mm <sup>2</sup> )
Close-Up 0.17x/0.2x for Standard lens*	209/125 $\mu\text{m}$	(80 x 60)	(80 x 60)
Close-Up 0.5x/0.6x for Standard lens*	70/41 $\mu\text{m}$	(27 x 20)	(27 x 20)
Microscopic lens 1.0x	35/25 $\mu\text{m}$	(13 x 10)	(16 x 12)

## Applications

- Process control and monitoring
- Monitoring of machines and installations
- Real-time thermography in research and development
- Security technology and early fire detection

\* Depending on the particular camera configuration.  
\*\*Pixel size for detector format (384 x 288)/(640 x 480)

Design and specifications subject to change without prior notice.

Produced by